



+

**P/N:3B50  
BCX85 PC**

**HIGH PERFORMANCE  
LITHIUM CELL**

**SIZE  
PC**


+ High Rate Capability

+ Lithium / Bromine Chloride Complex

**CELL SPECIFICATIONS**

**OPERATING TEMPERATURE**



Open Circuit Voltage (25° C)	3.9 V
Rated Discharge Current	1 mA
Rated Capacity	1 Ah
Maximum Continuous Current	10 mA
Cell Diameter	25.4 mm (1.00 in.)
Cell Length	7.62 mm (0.30 in.)
Cell Weight	13g
Lithium Weight	0.4g
Self Discharge	3% per year at 25°C
Operating Temperature	-55°C to +85°C -67°F to +185°F

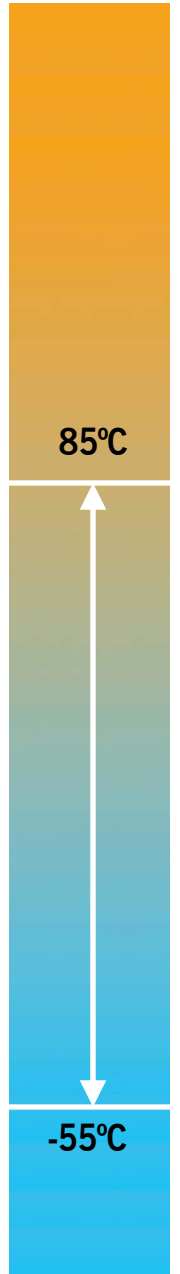

Rev: Jan 2006

PROPRIETARY AND CONFIDENTIAL: Proprietary information is contained herein. It is not to be used, reproduced or disclosed to others without prior written consent by GREATBATCH LTD.

**25°C discharge**

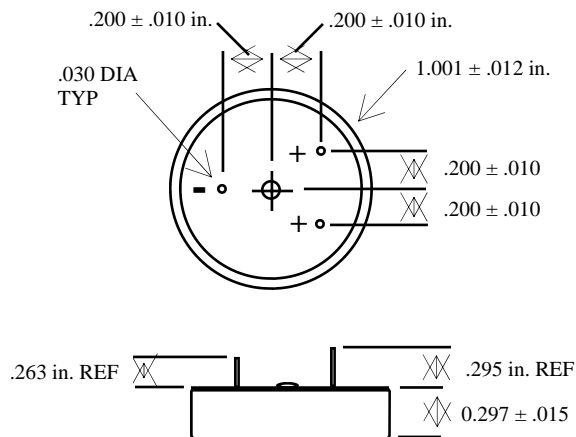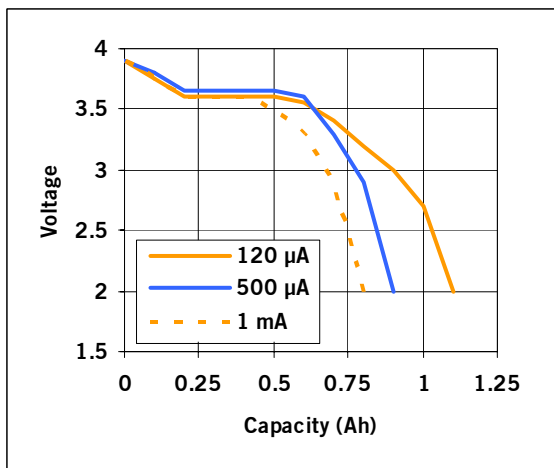

+ 9645 WEHRLE DRIVE, CLARENCE, NEW YORK 14031  
 + 716.759.5800 TEL + 716.759.2562 FAX + WWW.ELECTROCHEMPOWER.COM  
 + SALES@ELECTROCHEMPOWER.COM + A DIVISION OF GREATBATCH LTD.



**THE WORLD'S MOST RELIABLE > MOST DURABLE > LONGEST-LASTING > CELLS AND BATTERY PACKS**