

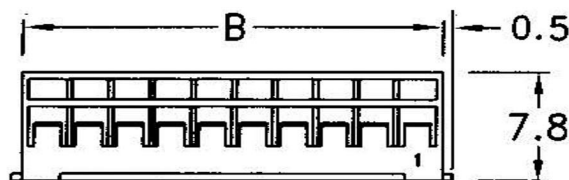


Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
2	2.0	4.6	2.3	6	10.0	12.6	8.3	10	18.0	20.6	12.3	14	26.0	28.6	16.2
3	4.0	6.6	2.3	7	12.0	14.6	10.3	11	20.0	22.6	16.2	15	28.0	30.6	16.2
4	6.0	8.6	4.3	8	14.0	16.6	12.3	12	22.0	24.6	16.2	16	30.0	32.6	16.2
5	8.0	10.6	4.3	9	16.0	18.6	12.3	13	24.0	26.6	16.2				

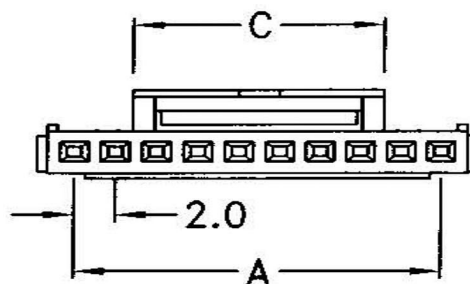

Features:

- 2 ~ 16 circuits available
- Material: UL 94V-0 nylon 66
- Standard color: White

Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Insulation resistance: 1000MΩ Max.
- Dielectric withstanding voltage: 800V AC/minute
- Temperature range: -25°C ~ 85°C  
(Including temperature rise)

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	BETTY	UNLESS OTHERWISE SPECIFIED TOLERANCE .000 ± 0.05 ( mm ) .00 ± 0.15 ( mm ) .0 ± 0.25 ( mm )	PART NAME 品名
DWG. 製圖	BETTY		2.0mm HOUSING 1XXXP WHITE COLOR
DATE 制表日	2008/04/28	SCALE 比例 參考	ROHS LOW-LEAD
		UNIT 單位 M M	PART NO.
		PAGE 張數 1 OF 1	料號 H2011-XXPW0000R
		REV. 版本 A	