

**Model:** Power-Xtra PX350XL1S -1S1P- 3.7V 350 mAh Li-Polymer Battery -25C

**Stock Code:** 900.869.503.143

## TECHNICAL INFORMATIONS


Item	Specifications	Conditions
Nominal Voltage	3.7V±0.05V	0.2C Discharge
Charging	Method	CC-CV
	Voltage	4.2V±0.05V
Typ. Capacity	350 mAh	0.2C Discharge cut-off Voltage 3.0V after standard charge at 23±2°C
Maximum Charge Voltage	4.2V	4.2V/Cell
Configuration	<b>1S1P</b>	
Standard Charging Current	175 mAh (0.5C)	Constant Current 0.5C
Standard Discharging Current	350 mAh (1.0C)	Constant current 1.0C
Max. Charging Current	350 mAh (1.0C)	
Max. Constant Discharge Current	<b>8.75 AH (25.0C)</b>	Ref.Temperature:10~50°C
Max. Burst Discharge Current	<b>17.5 AH (50.0C)</b>	≤3S
Discharge Cut-Off Voltage	<b>3.0V</b>	
Temperature	Charge	0 to +10°C
		10 to +45°C
	Discharge	-20 to +60°C
	Storage	Less than 1 year: -20~25°C
less than 3 months: -20~30°C		
less than 1 months: -20~45°C		
Weight	10.5 gr ±0.5 g	approximately
Cycles Test	Measure the capacity under the following cycle conditions until the cycle life ends when the three discharge capacity ≤80%, Cycle conditions: Standard Charge, rest for 30min;Discharge at 1.0C to 9V cut-off, Testing temperature is 23±2°C. Cycle Life≥500 cycles	

**Model:** Power-Xtra PX350XL1S -1S1P- 3.7V 350 mAh Li-Polymer Battery -25C

**Stock Code:** 900.869.503.143

## Cell Dimension

Item	Description	Dimension
T	Cell Tab Thickness	6.5± 0.7 mm
W	Cell Tab Width	20.0± 1 mm
L	Cell Tab Length	36.5± 1 mm
CL	Cable Length Length	-
P	Connector Model	-

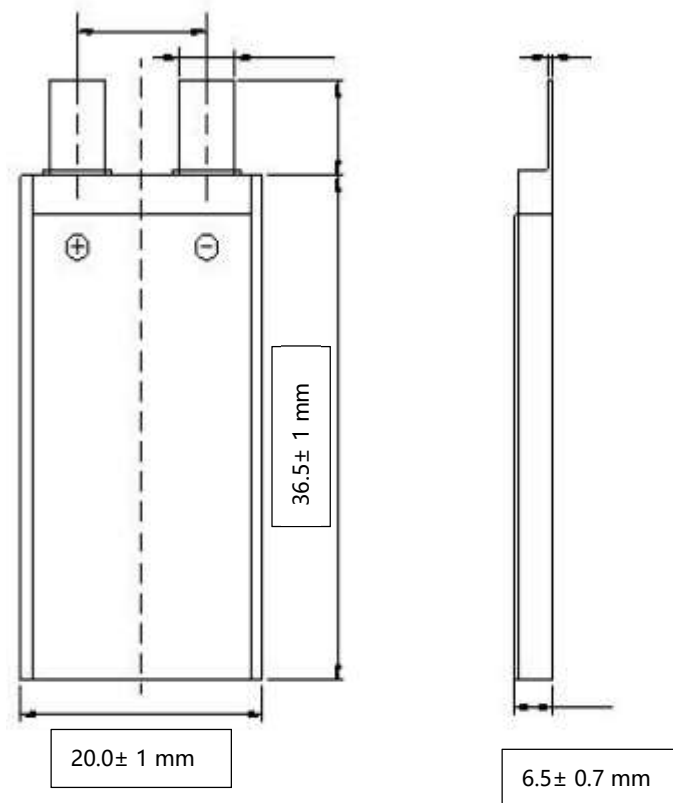

**Model:** Power-Xtra PX350XL1S -1S1P- 3.7V 350 mAh Li-Polymer Battery -25C

**Stock Code:** 900.869.503.143

## Battery Pack Dimension

Item	Description	Dimension
T	Cell Tab Thickness	7.6± 0.5 mm
W	Cell Tab Width	20.0± 1 mm
L	Cell Tab Length	41.0± 1 mm
CL	Cable Length Length	50.0 mm
P	Connector Model	JST-SYP-2P / 3239-20AWG

## Technical Drawing

