

**Model:** Power-Xtra PX603048 3.7V 900 mAh Li-Polymer Battery with connector and PCM(1.5A)  
**Stock Code:** 900.869.503.201

## TECHNICAL INFORMATIONS

Item	Specifications	Conditions
Nominal Voltage	3.7±0.05V	0.2C Discharge
Charging	Method	CC-CV
	Voltage	4.20±0.05V
Typ. Capacity	900 mAh	0.2C discharge
Standard Charge Current	180 mAh	Constant current 0.2C / end voltage 2.75V
Standard Discharging Current	180 mAh (0.2C)	Constant current 0.2C / end voltage 2.75V
Max. Discharge Current	900 mAh (1.5C)	1.0C
Temperature	Charge	0 to +45°C
	Discharge	-20 to +60°C
	Storage	Less than 1 year: -20~25°C less than 3 months: -20~40°C
Weight	23 gr	approximately
Cycles Test	Higher than 70% of the Initial Capacities of the Cells Carry out 500cycle Charging/Discharging in the below condition. ♦Charge: Standard Charge ♦Discharge: 0.5C to 2.75 V ♦Rest Time between charge /discharge: 30min. ♦Temperature: 20±5°C	

## PCM PARAMETER PER BATTERY PACK

Item	Content	Criterion
Current	Maximum Charge / Discharge	1.5A
Over charge Protection	Overcharge Det. Voltage	4.30±0.05V
	Overcharge Rel. Voltage	4.15±0.05V
Over charge Protection	Overdischarge Det. Voltage	3.00±0.10V
	Overdischarge Rel. Voltage	3.10±0.1V

# POWER-XTRA


**Model:** Power-Xtra PX603048 3.7V 900 mAh Li-Polymer Battery with connector and PCM(1.5A)

**Stock Code:** 900.869.503.201

## Dimension Details

Item	Description	Dimension
T	Cell Tab Thickness	6.2± 2 mm
W	Cell Tab Width	30.5± 2 mm
L	Cell Tab Length	50± 2 mm
CL	Cable Length Length	75± 0.3 mm
P	Connector Model	Molex 51021-0300 NTC

## Technical Drawing

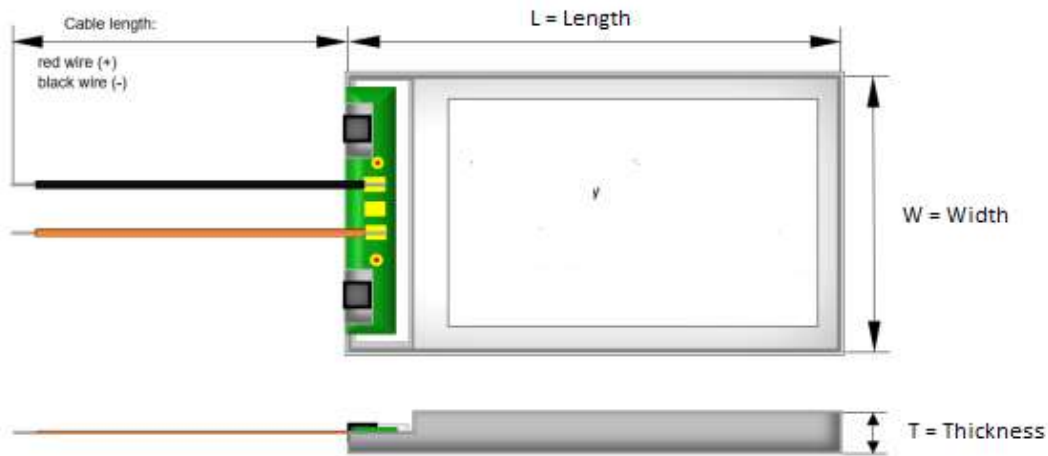

## Image

