

Model: Power-Xtra PX351420 3.7V 70 mAh Li-Polymer with PCM(Connector)

Stock Code: 900.869.503.279

TECHNICAL INFORMATIONS

Item	Specifications	Conditions
Nominal Voltage	3.7±0.05V	0.2C Discharge
Charging	Method	CC-CV
	Voltage	4.20±0.05V
Typ. Capacity	70 mAh	0.2C discharge
Standard Discharging Current	14 mAh (0.2C)	Constant current 0.2C end voltage 2.75V
Max. Discharge Current	70 mAh (1.0C)	
Temperature	Charge	0 to +45°C
	Discharge	-20 to +60°C
	Storage	Less than 1 year: -20~25°C less than 3 months: -20~40°C
Weight	3 g	approximately
Cycles Test	Higher than 70% of the Initial Capacities of the Cells Carry out 500cycle Charging/Discharging in the below condition. ♦Charge: Standard Charge ♦Discharge: 0.5C to 2.75 V ♦Rest Time between charge /discharge: 30min. ♦Temperature: 20±5°C	

PCM PARAMETER PER BATTERY PACK

Item	Content	Criterion
Current	Maximum Charge / Discharge	1.5A
Over charge Protection	Overcharge Det. Voltage	4.28±0.05V
	Overcharge Rel. Voltage	4.10±0.05V
Over charge Protection	Overdischarge Det. Voltage	2.40±0.10V
	Overdischarge Rel. Voltage	3.00±0.1V



Model: Power-Xtra PX351420 3.7V 70 mAh Li-Polymer with PCM(Connector)

Stock Code: 900.869.503.279

Dimension Details

Item	Description	Dimension
T	Cell Tab Thickness	4.2± 1 mm
W	Cell Tab Width	15± 1 mm
L	Cell Tab Length	23± 2 mm
CL	Cable Length Length	50± 0.3 mm
P	Connector Model	JST-02SUR

Technical Drawing

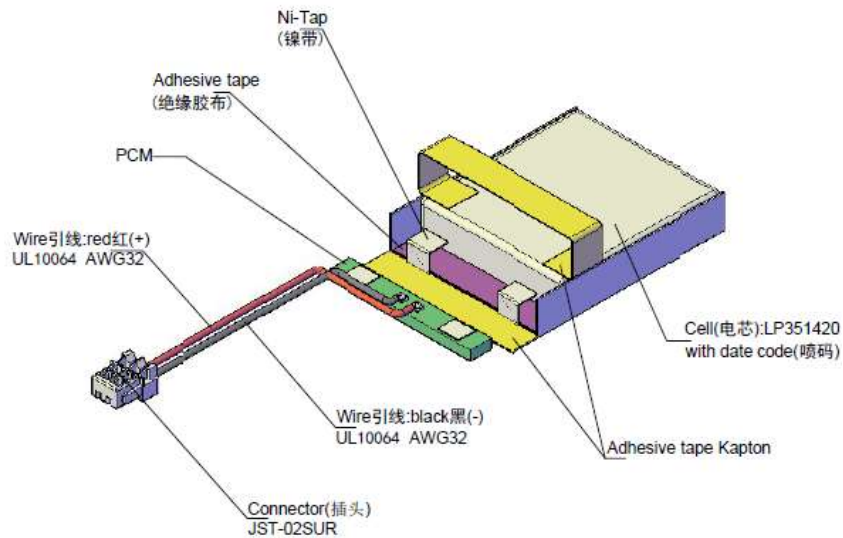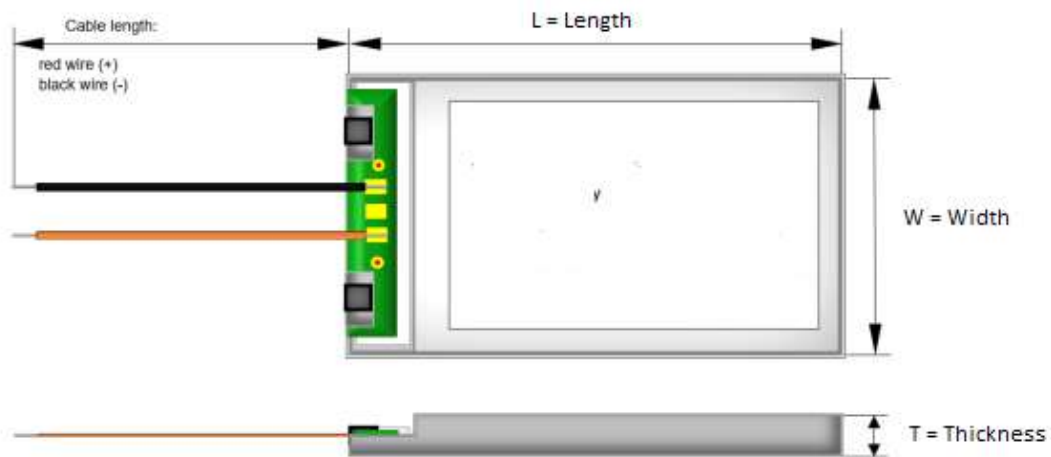

Model: Power-Xtra PX351420 3.7V 70 mAh Li-Polymer with PCM(Connector)

Stock Code: 900.869.503.279

Image

