


Technical Information: Alkaline Manganese Batteries

# LR6 Standard

■ Dimension

		JIS/mm
h1	Overall height	Max. 50.5 Min.(49.2)
d6	Outer diameter of the negative contact range	Min. 7.0
h4	Recess of negative contact from enclosure	Max. 0.5
d3	Diameter of the positive contact	Max. 5.5 Min. (4.2)
h3	Height of the protected flat contact form the next higher	Min. 1.0
d1	Diameter	Max. 14.5 Min. 13.5

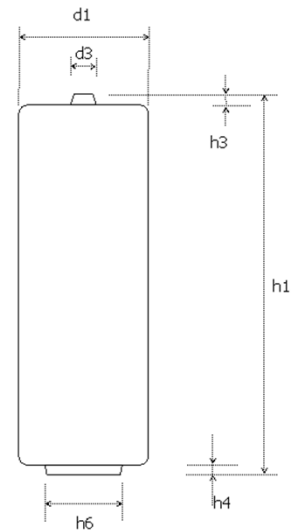

■ Rating

Type designation	LR6 Standard	
Norminal Voltage	1.5V	
Weight	23.0g	
Typical capacity	2,700mAH (75Ω Cont. Discharge)	
Outer dimentsion	Height 50.1mm	
	Diameter 14.0mm	
Average Dyratuib @ 20°C (Not guranteed perormance)	43 Ω 4hr/day(0.9V) Radio/Clock	86hr
	250mA 1hr/day(0.9V) CD/Electronic games	7.6hr
	1000mA 10s/min 1hr/day(0.9V) Photo flash	450cycle
	1500mA 5min/hr 24hr/day(1.05V) Digital still camera	65cycle

Note) Value in parentheses is end point voltage of each discharge

■ Discharging curve

