

## SPECIFICATIONS (Typical values stored at 20°C for one year)

- **Nominal capacity** **1.2Ah**  
(at 1mA/20°C/68°F/2.0V cut-off)
- **Nominal voltage** **3.6V**
- **Max. recommended continuous current** **30mA**  
(Higher current can be available upon consulting)
- **Max. pulse current capability★** **60mA**
- **Operating temperature range** **-55 ~+85°C**
- **Lithium metal content** **approx. 0.3g**
- **Weight** **9g**
- **Volume** **4.3cm<sup>3</sup>**
- **UL Approval** **MH28122**

### Max Pulse Capability

Maximum Pulse capability reading over 3.0V at 60mA/0.1sec. every 2 min. at +20°C, 10 $\mu$ A / cm<sup>3</sup> base current with fresh batteries. The pulse capability can be different to the cell status, environment. For max. pulse coverage, capacitor support is recommended.



Dimensions in mm




### Available Terminal Type

Case


### Storage Condition

Please store batteries at clean, cool (not over +30°C), dried (less than 30% RH) and ventilated condition

## Discharge Characteristics at +20°C

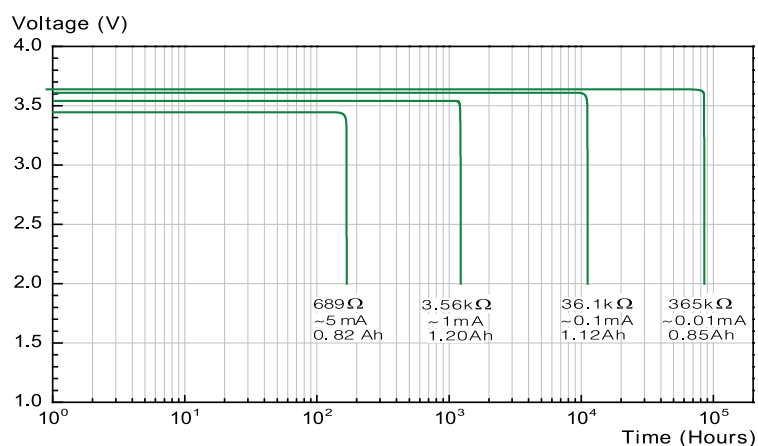

## Capacity versus Current

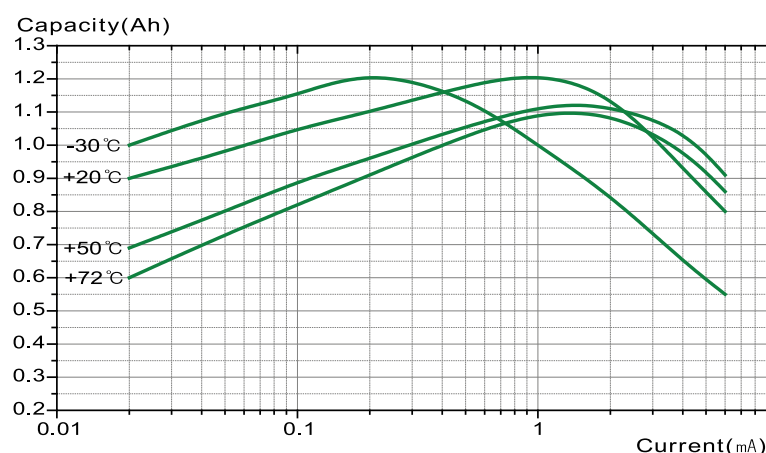

## Operating Voltage

