

Model: Power-Xtra PX502535 - 3.7V 400 mAh Li-Polymer Battery -BMS-1.5A
Stock Code: 900.869.503.109

TECHNICAL INFORMATIONS

Item	Specifications	Conditions
Nominal Voltage	3.7±0.05V	0.2C Discharge
Charging	Method	CC-CV
	Voltage	4.20±0.05V
Typ. Capacity	400 mAh	0.2C discharge
Standard Charging Current	80 mAh (0.2C)	Constant current 0.2C end voltage 2.75V
Standard Discharging Current	80 mAh (0.2C)	Constant current 0.2C end voltage 4.2V
Max. Continuous Charge Current	400 mAh (1.0C)	
Max. Continuous Discharge Current	400 mAh (1.0C)	
Temperature	Charge	0 to +45°C
	Discharge	-20 to +60°C
	Storage	Less than 1 year: -20~25°C less than 3 months: -20~40°C
Weight	10 g	approximately
Cycles Test	Higher than 70% of the Initial Capacities of the Cells Carry out 500cycle Charging/Discharging in the below condition. ♦Charge: Standard Charge ♦Discharge:0.5C to 2.75 V ♦Rest Time between charge /discharge:30min. ♦Temperature:20±5°C	

PCM PARAMETER PER BATTERY PACK


Item	Content	Criterion
Current	Maximum Charge / Discharge	1.5A
Over charge Protection	Overcharge Det. Voltage	4.28±0.05V
	Overcharge Rel. Voltage	4.10±0.05V
Over charge Protection	Overdischarge Det. Voltage	2.40±0.10V
	Overdischarge Rel. Voltage	3.00±0.1V

Model: Power-Xtra PX502535 - 3.7V 400 mAh Li-Polymer Battery -BMS-1.5A
Stock Code: 900.869.503.109

Dimension Details

Item	Description	Dimension
T	Cell Tab Thickness	5.2± 0.5 mm
W	Cell Tab Width	25± 1 mm
L	Cell Tab Length	35± 1 mm
CL	Cable Length Length	100± 0.3 mm
P	Connector Model	-

Technical Drawing

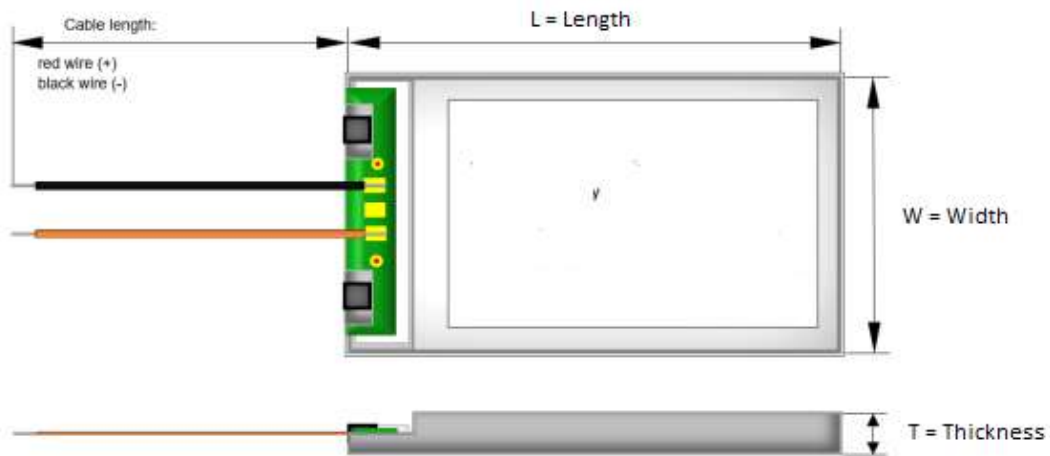

Image

