

POWER-XTRA

Model : Power-Xtra 3.6V ER14335M 2/3AA Lithium Battery

Ver:1.0 NO: 900.600.503.134

ER14335M

**3.6v Primary Lithium Thionyl
Chloride High Power
Bobbin Battery**

Benefits

- High energy density
- High voltage, stable during most of the application's lifetime
- Wide range of operating temperature[-55°C ~ +85°C]
- Low self-discharge rate
[less than 1% per year of storage]
- Long storage life
[10 years under normal room temperature]

Main application

- Intelligent Instrument and meter
- Memory and standby power
- Alarms and security devices
- Automotive electronics
- Electronic toll collection
- Military devices

Electrical characteristics (23±2°C)

Nominal capacity	1.2Ah
Nominal voltage	3.6V
Maximum recommended continuous current	300mA
Maximum recommended pulse current	500mA
Operating temperature range	-55°C ~ +85°C

UL U.L. Component Recognition MH 29130

Physical characteristics

Diameter[max]	14.5 mm
Height[max]	33.5mm
Typical weight	14 g

Available terminations

S: Standard terminations

T: Solder tabs

P: Axial pins

Special termination are available upon request.

MSDS is available upon request.


POWER-XTRA

Model : Power-Xtra 3.6V ER14335M 2/3AA Lithium Battery

Ver:1.0 NO: 900.600.503.134

ER14335M

3.6v Primary Lithium Thionyl Chloride High Power Bobbin Battery

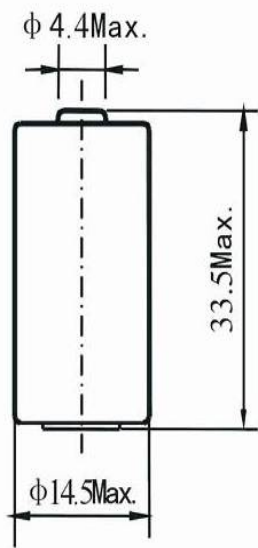

S: Standard termination

Warning:

- Fire, explosion and burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C incinerate.
- Do not use the battery beyond permitted temperature range.

